


# VideoTile 25

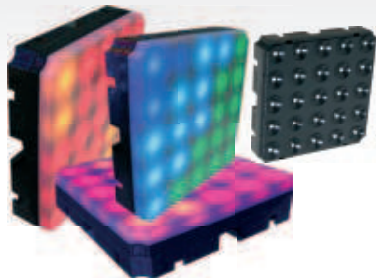

Deca LED® VideoTile 25 Product Specification	
Code	95122249
Description	DecaLED® VideoTile 25, 24VDC
Type	DECA.VID.25
Controller type	DecaLED® Video Driver Pro 36
LED properties	SMD three-in-one chip
Dimensions	200 x 200 x 37 mm
Weight	800 g
Note	Needs PSU + Driver

### Accessories

Control	PSU
 Video Driver Pro-36 95322241	 PSU for video tile 95792400

Deca LED® Video Frame 12 Product Specification	
Code	95123249
Description	DecaLED® Video Frame 12
Type	DECA.VID.FR
Controller type	DecaLED® Video Driver Pro 36
LED properties	SMD three-in-one chip
Dimensions	800 x 600 x 147 mm
Note	Built-in PSU

Due to the growing demand for video-like LED installations, Lagotronics developed the DecaLED® VideoTile 25. This easy-to-use system can be used as a big pixel videowall for a wide variety of installations.

Ideally suited for events, theatres, studios, displays or architectural installations, the VideoTile is available with a frosted acrylic cover that conceals the 25 individually controlled RGB SMD LEDs.




Using the DecaLED® Video Tile 25 as a videowall, news browser or decorative fixture adds a lot of possibilities for clients to realize creative and appealing ideas for new or existing projects. With the unique possibility to later add or remove the cover, this product is multifunctional to say the least.

The DecaLED® Video Tile 25 is controlled by using our DecaLED® Video Driver Pro 36 for 432 Video Tiles 25. Please note that per 12 pieces a DecaLED PSU for Video Tiles is needed.

The Video Tile 25 can be directly controlled using the DecaLED® PSU for Video Tiles, which requires a DMX signal. Each controller can handle a maximum of 6 units.

### Video Frame 12:

The DecaLED® Video Frame 12 is ideal for quick building and dismantling of videowalls. Besides the modular character, it is ideal because the case features an onboard PSU and just needs to be connected to a Video Driver Pro 36, using one output per Video Frame 12.

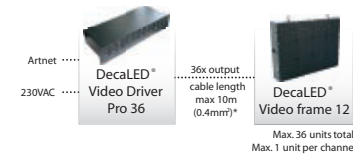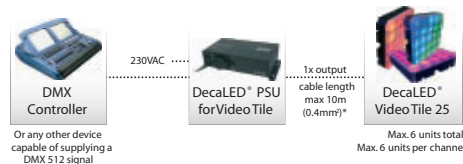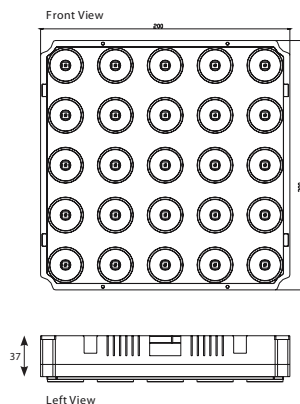

\* For installations that require longer cable length please contact your sales representative or calculate this using the product information.

