

IP Strip

Waterproof IP65



Deca LED® IP Strip RGB Product Specification		
Code	95564129	95565129
Description	DecaLED® IP Strip RGB 400mm	DecaLED® IP Strip RGB 1000mm
Type	DECA.IPST400.RGB	DECA.IPST100.W
Input voltage	12VDC	12VDC
Current	0.12A	0.4A
Power consumption	1.44W	4.8W
Max. chainable	20	7
Current at max. chain	2.4A	2.8A
Power consumption at max. chain	28.8W	33.6W
Control	DecaLED® Controller 2 / Controller 2 Mini	
Max. per controller	120/40	40/12
Max. per output	20/20	7/7
LED properties	24 single colour Flux LEDs R,G,B	60 single colour Flux LEDs R,G,B
Dimensions	400x18x13mm	1000x18x13mm
Weight	150g	350g
IP rating	IP65	IP65

Accessories

Control	Control	PSU
P.93 Controller 2 95350121	P.95 Controller 2 Mini 95350122	P.25 IP PSU 12VDC various PSUs available
Bracket	Cabling	
95740470	95751203	




The DecaLED® IP Strip is a useful addition to the DecaLED® IP products because of its smaller dimensions and technology.

The DecaLED® IP Strips offer a solution for outdoor fixtures with LED lighting. This provides the possibility to light up your facade or exterior contour lines with LED lighting to your liking.




The DecaLED® IP Strip is available in many different variations. The strips have an IP65 value and can be applied in various outdoor projects.

Please note that we offer various methods of control. Please look at the indicators for the correct drivers, controllers and accessories.

Deca LED® IP Strip SC Product Specification			
Code	95565124	95568124	95569124
Description	DecaLED® IP Strip SC 530mm various colours	DecaLED® IP Strip SC 780mm white	DecaLED® IP Strip SC 1000mm white
Type	see next page	DECA.IPST80. W	DECA.IPST100. W
Input voltage	12VDC	12VDC	12VDC
Current	0.2A	0.3A	0.4A
Power consumption	2.4W	3.6W	4.8W
Max. chainable	10	8	7
Current at max. chain	2A	2.4A	2.8A
Power consumption at max. chain	24W	28.8W	33.6W
Control	DecaLED® Controller 2 / Controller 2 Mini		
Max. per controller	80/25	50/15	40/12
Max. per output	10/10	8/8	7/7
Max. per PSU 12V 30W	12	9	6
Max. per PSU 12V 60W	24	16	12
Max. per PSU 12V 150W	50	40	30
Max. per PSU 12V 80W	30	20	15
Max. per PSU 12V 200W	801	50	40
LED properties	30 single colour Flux LEDs	46 single colour Flux LEDs	60 single colour Flux LEDs
Dimensions	530x18x13mm	780x18x13mm	1000x18x13mm
Weight	150g	225g	300g
IP rating	IP65	IP65	IP65

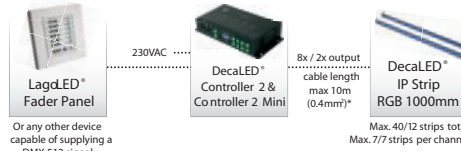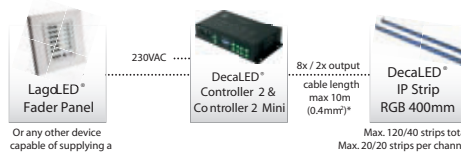

Deca LED® IP Strip SC Product Specification		
95565121	DecaLED® IP Strip, Red, 530mm, 30 LEDs	DECA.IPST.R
95565122	DecaLED® IP Strip, Green, 530mm, 30 LEDs	DECA.IPST. G
95565123	DecaLED® IP Strip, Blue, 530mm, 30 LEDs	DECA.IPST. B
95565124	DecaLED® IP Strip, White, 530mm, 30 LEDs	DECA.IPST.W
95565125	DecaLED® IP Strip, Amber, 530mm, 30 LEDs	DECA.IPST. A

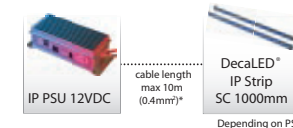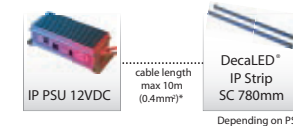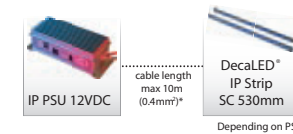

* For installations that require longer cable length please contact your sales representative or calculate this using the product information.

